

Volume 13

Number 1

JUNE 2011



# IFE JOURNAL OF SCIENCE

A Journal of the Faculty of Science  
Obafemi Awolowo University, Ile-Ife, Nigeria

ISSN 0794-4896

# Ife Journal of Science

## Aims and Scope

Ife Journal of Science (IJS) aims to publish articles resulting from original research in the broad areas of chemical, biological, mathematical and physical sciences. This extends naturally into frontiers that include the applied areas of Biochemistry and Geology as well as Microbiology and such allied fields as Biotechnology, Genetics, Food Chemistry, Agriculture, Medical and Pharmaceutical Sciences. Shorter-length manuscripts may be accepted as *Research notes*. Review articles on research topics and books are also welcome.

**Editor-in-Chief (Biological Sciences):** Prof. J. O. Faluyi

**Editor-in-Chief (Physical Sciences):** Prof. M. O. Olorunfemi

## Associate Editors

Dr. A. O. Shittu - *Microbiology*  
Prof. G. A. O. Arawomo - *Zoology*  
Prof. A. P. Akinola - *Mathematics*  
Prof. F. O. I. Asubiojo - *Chemistry*  
Prof. A. A. Okunade - *Physics*  
Dr. A. I. Odiwe - *Botany*  
Prof. S. O. Asaolu - *Zoology*  
Prof. O. O. Jegede - *Physics*  
Dr. B. O. Omafuvbe - *Microbiology*  
Dr. F. K. Agboola - *Biochemistry*

Prof. T. O. Obilade - *Mathematics*  
Prof. J. O. Ajayi - *Geology*  
Prof. H. C. Illoh - *Botany*  
Prof. H. B. Olaniyi - *Physics*  
Prof. O. O. Oyedapo - *Biochemistry*  
Prof. S. B. Ojo - *Geophysics*  
Prof. J. O. Nwachukwu - *Geology*  
Dr. A. O. Ogunfowokan - *Chemistry*  
Prof. G. A. Oshinkolu - *CERD*  
Dr. C. C. Adeyemi - *Natural History Museum*

## International Advisory Committee

Prof. Dr. Thomas Foken, *Bayreuth, Germany*  
Prof. Dr. Stefan Wornlich, *Germany*  
Prof. O. O. Kassim, *Washington DC, USA*  
Dr. Walter Kpikpi, *Tamale, Ghana*  
Prof. J. A. Lockwood, *Laramie, USA*  
Prof. Bjorn Malmgren, *Goteborg, Sweden*  
Prof. Dr. Gunther Matheis, *Berlin, Germany*

Prof. J. O. Nriagu, *Michigan, USA*  
Prof. Kwabena Oduro, *Legon, Ghana*  
Prof. J. O. Olowolafe, *Delaware, USA*  
Prof. Adrian Raftery, *Seattle, USA*  
Prof. L. G. Ross, *Stirling, UK*  
Prof. Reuben H. Simoyi, *Portland, USA*  
Prof. Tetsumaru Itaya, *Japan*

**Two issues of the journal will be published yearly (June and December).**

### **Submission of manuscripts:**

All manuscripts should be submitted to either of the Editors-in-chief, Ife Journal of Science: Prof. J. O. Faluyi, Department of Botany, or Prof. M. O. Olorunfemi, Department of Geology, Obafemi Awolowo University, Ile-Ife, Nigeria.

E-mail: jfaluyi@gmail.com (Tel.: +234-803-7250857)

molorunfel@yahoo.co.uk (Tel.: +234-803-7192169)

## MASS AND ENERGY AUDIT IN A NIGERIAN IRON AND STEEL SMELTING FACTORY: AN OPERATIONAL AND EFFICIENCY STUDY.

O. K. Owoade<sup>1\*</sup>, F. S. Olise<sup>1</sup>, H. B. Olaniyi<sup>1</sup>, I. B. Obioh<sup>2</sup> and E. Bolzacchini<sup>3</sup>

<sup>1</sup>Environmental Research Laboratory (ERL), Physics Department, Obafemi Awolowo University, Ile-Ife, Nigeria.

<sup>2</sup>Centre for Energy Research and Development (CERD), Obafemi Awolowo University, Ile-Ife, Nigeria.

<sup>3</sup>Universita Milano-Bicocca, Dipartimento di Scienze-Ambientali, Pizze della Scienza, Milano, Italy.

(Received: September, 2010; Accepted: December, 2010)

### ABSTRACT

A mass and energy audit study of an iron and steel smelting factory in Nigeria was carried out. Information was obtained on material and energy usage in different sections of the factory with the aid of questionnaires, while suspended particulate concentrations were determined at different sections of production using Negretti 1000 air sampler for collecting total suspended particulate (TSP) samples and a Gent PM<sub>10</sub> air sampler for particle size fractionated particulates samples. The study was carried out for a period of one year in four major sections of the industry: two electric-arc furnaces (EAF-1 and EAF-2), continuous casting (CC), and rolling mill (RM).

Annual average energy efficiency of 52% was estimated at EAF-1 while that of EAF-2 continuous casting and rolling mill were 59%, 63% and 69% respectively. Also, annual average mass efficiencies of 91% (EAF-1), 89% (EAF-2), 91% (CC) and 97% (RM) were obtained. The annual average of the mass concentration values measured at EAF-1 & 2, CC and RM sampling sites were respectively 2306, 3335, 2534 and 646 g/m<sup>3</sup> for TSP and at EAF-1 & 2, CC and RM sampling sites were respectively 190, 153, 148 and 93 g/m<sup>3</sup> for PM<sub>2.5</sub> and at EAF-1 & 2, CC and RM sampling sites were respectively 2051, 4570, 3319 and 687 g/m<sup>3</sup> for PM<sub>10</sub>.

The recorded higher annual average energy efficiency of 63% at continuous casting sections compared with either of the furnaces affirms energy conservation in the tundish (a closed system). High particulate mass loading was recorded at the two electric arc furnaces in comparison with the remaining sections. The high particulate loadings at the said two furnaces corroborate the high emission factors recorded at the furnaces.


**Keywords:** Steelmaking, Efficiency, Mass Balance, Energy Balance, Emission Factor

### INTRODUCTION

There has been a remarkable growth in the establishment of cottage factories in Nigeria in the last two decades and about 70% of these factories are within Lagos state (Adejumo *et al.*, 1994). The state play host to a number of factories, one of these is the secondary iron and steel smelting factory. The high demand for iron rods and the availability of the raw materials (scrap metals) in the country are the main drivers of the growth of this factory. The activity of the smelting factory depends on a lot of scraps and enormous amount of energy. These activities have to be matched with proper planning for the control of environmental pollution problems that are usually associated with the development from such factories. This has been very lacking (Akeredolu, 1989; Ogunsola *et al.*, 1995 & Obiajunwa *et al.*, 2002).

Iron and steel smelting is an oxidation-reduction process in which iron scrap is the major raw

materials. The iron scrap, at its varying degree of degradation, is first heated to effect the oxidation of some of its constituent elements such as iron, silicon, sulphides and other impurities. Additives such as the ferro alloys (Fe-Si, Fe-Mn), limestone (CaCO<sub>3</sub>) and coke (if necessary) are added into the molten steel in the furnace through a charging door by shoveling. Some of the oxides or elements in complex forms, whose reduction is not favoured by the kinetics of the reaction, form complex compounds which go into the slag phase as shown below

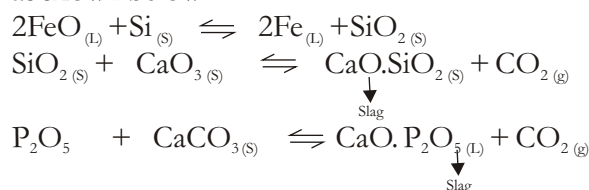

In an exceptional case when the carbon content of the melt is very low, fine silica sand is usually added coupled with more limestone. This aids the reduction process by separating the slag produced

from the molten steel so that the slag and the steel which are both in their molten forms occur in physically two distinct phases (Bradley, 1989). Refining, this often occurs in ladles or sometimes in the furnace is done by removing unwanted impurities, such as sulfur, from the melt (Little, 1992). During these processes, air pollutants are emitted such as FeO, Fe<sub>2</sub>O<sub>3</sub>, SiO<sub>2</sub>, CaO, MgO, volatile organic compounds (VOCs), CO<sub>2</sub> and particulate matter (Swaney and Cignetti, 1990 & Marsosudiro, 1994).

Mass Balance (MB) analysis involves the quantification of material flow going in and out of a process, where the difference between inputs and outputs is assumed to be discharged to the environment as solid, liquid and gaseous wastes. It applies the law of conservation of mass to a facility, process or equipment. Essentially, if there is no accumulation, then all the materials that go into the system must come out. Emissions are determined from the difference in the input and output of a unit operation and it dependent on the source type considered (OECD/IEA/Eurostat, 2004). MB methods may or may not account for emission controls, depending on the system, process or operation to which the mass balance is applied. Anderson *et al.*, 1998 suggested that care should be taken to ensure that the effect of pollution-control equipment is taken into account when performing mass balance calculations.

Energy balance may be relatively simple or complex, it depends on how many kinds of energy sources are used in how many different ways and how much statistical data are available on the various energy transactions (supply, transformation or use of a source), how much is needed in a particular period of time (Thomson *et al.*, 2000). This is used to establish potential losses in the plant. The recorded figures of energy input in different forms provide a convenient information source on the norms of consumption or coefficients for use in material balances. The energy input is used to estimate the required form of energy for each production section, providing detailed insight into the energy.

Scrap iron and steel smelters emit an enormous amount of pollutants consisting of particulate matter and gases into the air. The Suspended Particulate Matters (SPM) generated vary from one production process to another due to difference in inputs and the type of technologies used at each production stage (USEPA, 1995 & Baker Environmental, 1992).

In this work, airborne particulates are sampled at each production section of an iron and steel smelting factory with the mass and energy budget taken into consideration with a view to estimating the operational efficiency.

In this factory the production processes could be divided into three major sections: the two Electrical arc furnaces (EAFs), continuous casting and the rolling mills. The two EAFs were three-graphite electrode arc furnaces, which had been in operation for 30 and 12 years respectively. The inside of the furnaces were covered with metal clad refractory bricks. Air is introduced into the EAF and electrically heated up to about 1600°C. In the continuous casting section, the molten steel in the ladle was poured into a tundish, from which the moulds for billets were filled, the moulds with the billets inside were cooled with water flowing at the rate of 100 litres per minute. The billets produced were conveyed to the electric oven linked up with rolling machine for producing the finished products of various rod sizes. The finished rolled rods were then cut into specified length as required by customers.

## MATERIALS AND METHODS

A reconnaissance survey was carried out under the guidance of operation engineers; and four major production sections were identified in the factory. These are: two electric-arc furnaces (EAF-1 and EAF-2), continuous casting, and rolling mill. Questionnaires were served on the engineers in each of the production section to obtain the following information (resulting in the required data):

Material usage:

- (i) for EAFs: tons of scrap (iron, steel and non-ferrous metals), additives (Fe-Mn, Fe-Si, Coke, MgO and limestone), molten steel produced, and slag generated,
- (ii) for continuous casting: tons of molten steel input, billets produced, and slag generated,
- (iii) for the rolling mill: tons of billets consumption as input, waste rods, milled scale and rolled rod product.

Energy usage:

- (i) for EAFs: electricity through the national grid (kWh) and diesel oil (L),
- (ii) for continuous casting: low pour fuel oil (LPFO) (L), Gas (kBar),
- (iii) for rolling mill: Gas (kBar) and diesel oil (L).

Material balance audit was accomplished using all the total inputs, products, solids and gaseous wastes on monthly and yearly bases. The emission factor (EF) was computed for all the four main production sections using the total tonnage of input charge, molten steel produced and used, total billets produced and used, rolled rod produced, wasted rod, milled scale slag and total waste generated. Estimates of the inputs, the output products and the wastes generated are given as:

$$M_i \quad M_s \quad M_{Fe\ Mn} \quad M_{Fe\ Si} \quad M_{Lime} \quad M_{MgO} \quad M_{Coke} \quad 1$$

where

$M_i$  is the total weight of inputs,  $M_s$  is the total weight of scrap used in EAF 1 & 2,  $M_{Fe\ Mn}$  is the total weight of Fe-Mn flux,  $M_{Fe\ Si}$  is the total weight of Fe-Si flux used,  $M_{Lime}$  is the total weight of limestone used,  $M_{MgO}$  is the total weight of MgO used as flux and  $M_{Coke}$  is the total weight of the coke used, and

$$M_o \quad M_p \quad M_s \quad M_{WR} \quad M_M \quad M_E \quad 2$$

where

$M_o$  is the total weight of outputs,  $M_p$  is the total weight of the products in each section,  $M_s$  is the total weight of slag generated in each section,

$M_{WR}$  is the total weight of the waste rod (only in the rolling mill),  $M_M$  is the total weight of the mill scale (only in the rolling mill) and  $M_E$  is the expected total weight of particulate matter both in liquid and gaseous states.

Based on the material balance, the emission factors for emission into the ambient air were estimated from the material deficits in the four production processes using:

$$EF = \frac{M_i - (M_p + M_s)}{M_p} \quad 3$$

The questionnaire provided detailed information on sources of energy used in each production section such as: average energy used per charging, quantity of fuel used, output energy obtained from the energy consumed per unit product in each production process. The data were analyzed to obtain the energy efficiency using the input and output energies. Using the energy equivalent per litre of diesel oil, the total diesel oil consumed was converted to total energy used through diesel oil. Similar conversion was done to obtain the total energy consumed in preheating ladles where gas was used. The total input energy for EAFs was then obtained using:

$$E_i \quad E_N \quad E_{oil} \quad E_G \quad 4$$

where,

$E_N$  Is total energy supplied from national grid,  $E_{oil}$  is total energy generated through LPFO from generator, and  $E_G$  is the energy generated from the liquefied gas.

The total energy consumed at the EAFs was computed using average energy consumed from generating plant per heating and the number of heating carried out for each month. The difference was obtained to estimate the energy efficiency at EAF. Likewise, the energy inputs were computed for the continuous casting and the rolling mill. The main limitation was in the estimation of the energy losses to the environment which were due to conversion losses and standby losses (heat leakage through conduction, convection and radiation).

Also, suspended particulate matter (PM<sub>10</sub> and PM<sub>2.5</sub> fraction) were sampled using a Gent PM10 air sampler on the membrane filter in the factory once a month for twelve months starting from April, 2003 to March, 2004, with sampling time varying from 4 to 24 hours depending on the level of activity at each sampling location. The mass concentration ( $\mu\text{g}/\text{m}^3$ ) of each loaded filter was obtained using:

$$C = \frac{W_f - W_i}{V} \quad 5$$

where,  $W_f$  is the weight of the filters after sampling,  $W_i$  is the weight of the filter before sampling and  $V$  is the volume of the air sampled which was obtained using the average flow rate and the sampling time.

## RESULTS AND DISCUSSION

The results of mass balance and emission factors analyses in the four major production processes are shown in Figures 1(a) to (d) and Figure 2. For EAF-1 the monthly mass efficiency ranged from 90% to 92% with annual average efficiency of 91% while the average annual mass efficiency for EAF-2 was 89% with a monthly range of 88% to 90%. The average percentage of the gaseous emission per ton-molten steel produced was estimated to be 3.4% for EAF-1 and 3.6% for EAF-2. This is an indication that higher gaseous emission occurred at EAF-2. The mass efficiencies for EAF-1 and EAF-2 compare favourably with typical EAFs in United States and China, which have efficiencies of 94% and 91% respectively (IISI, 1999 and China's Agenda 21, 1994). At the continuous casting process, the

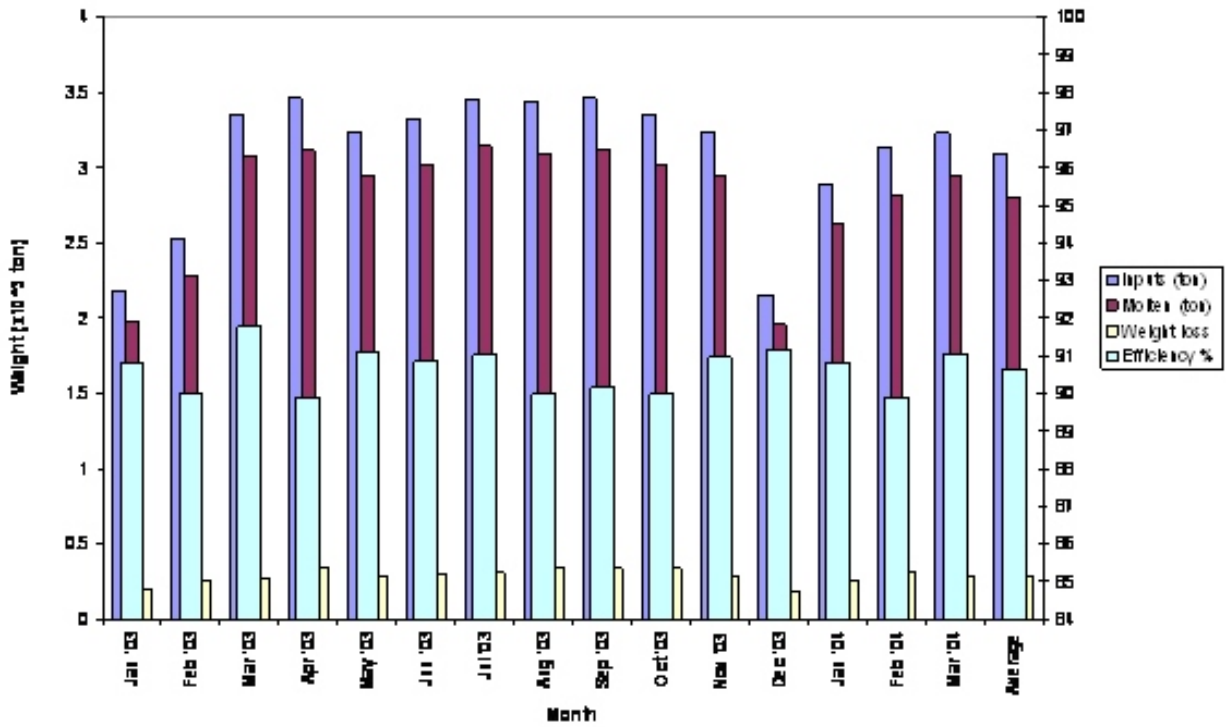


Fig. 1 (a): Monthly Mass Audit with the Mass Efficiency Trends in EAF-1

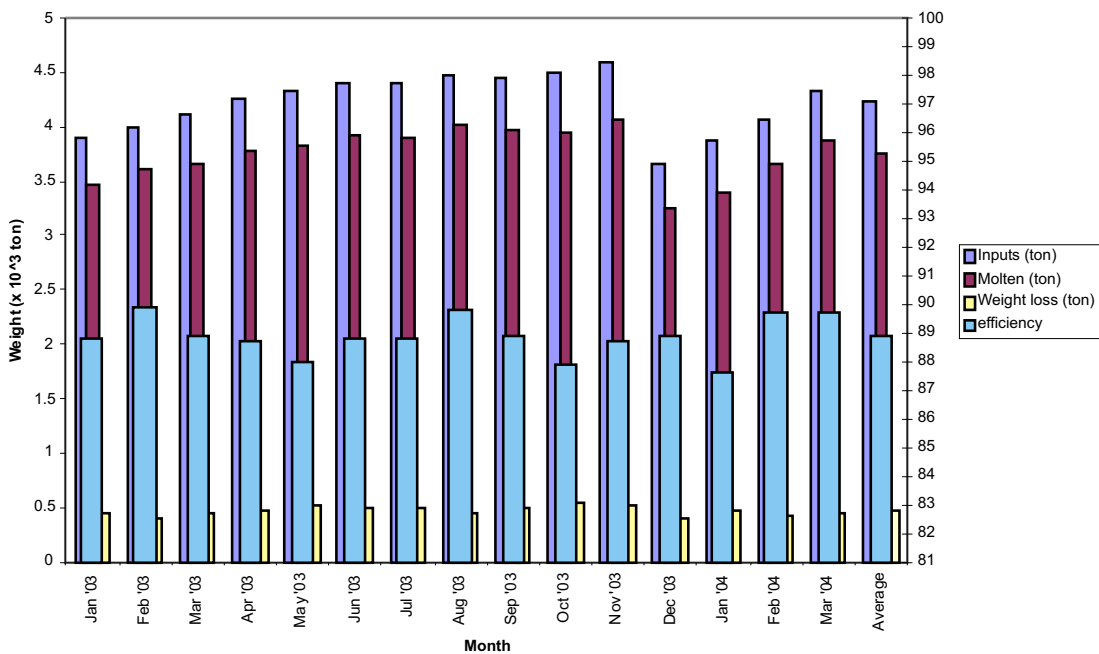


Fig. 1 (b): Monthly Mass Audit with the Mass Efficiency Trends in EAF-2

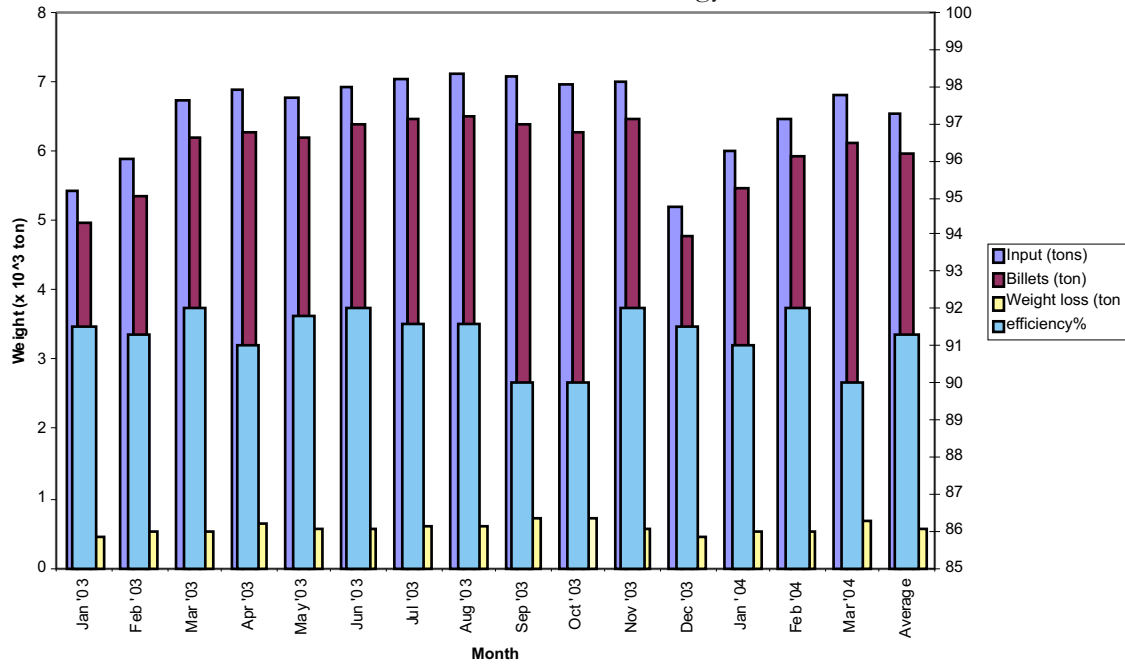


Fig. 1 c: Monthly Mass Audit with the Mass Efficiency Trends in Continuous Casting

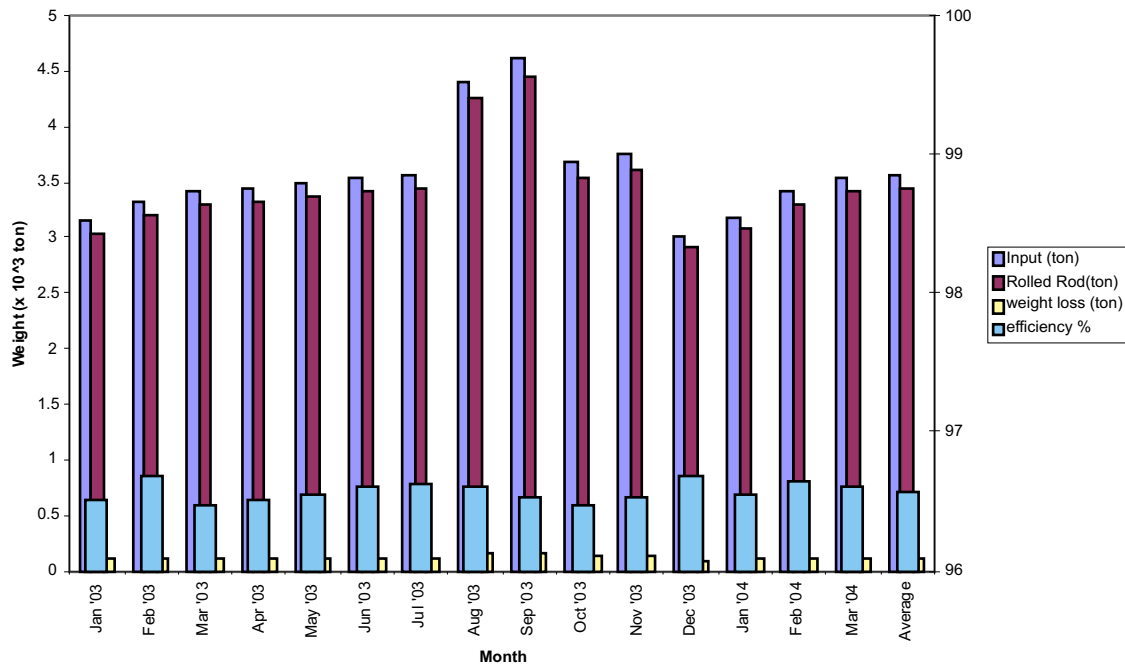


Fig. 1 d: Monthly Mass Audit with the Mass Efficiency Trends in Rolling Mill

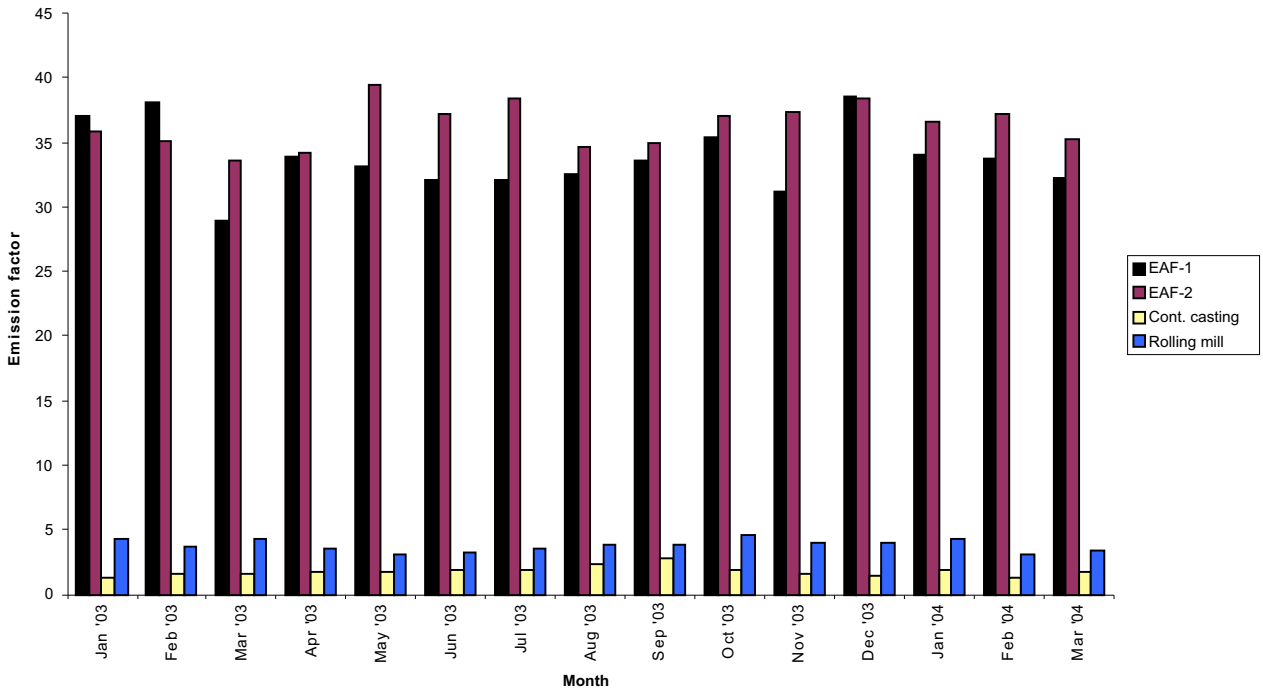


Fig. 2: Average Monthly Emission Factors (kg/ton-product) Trend in the Four Major Production Sections

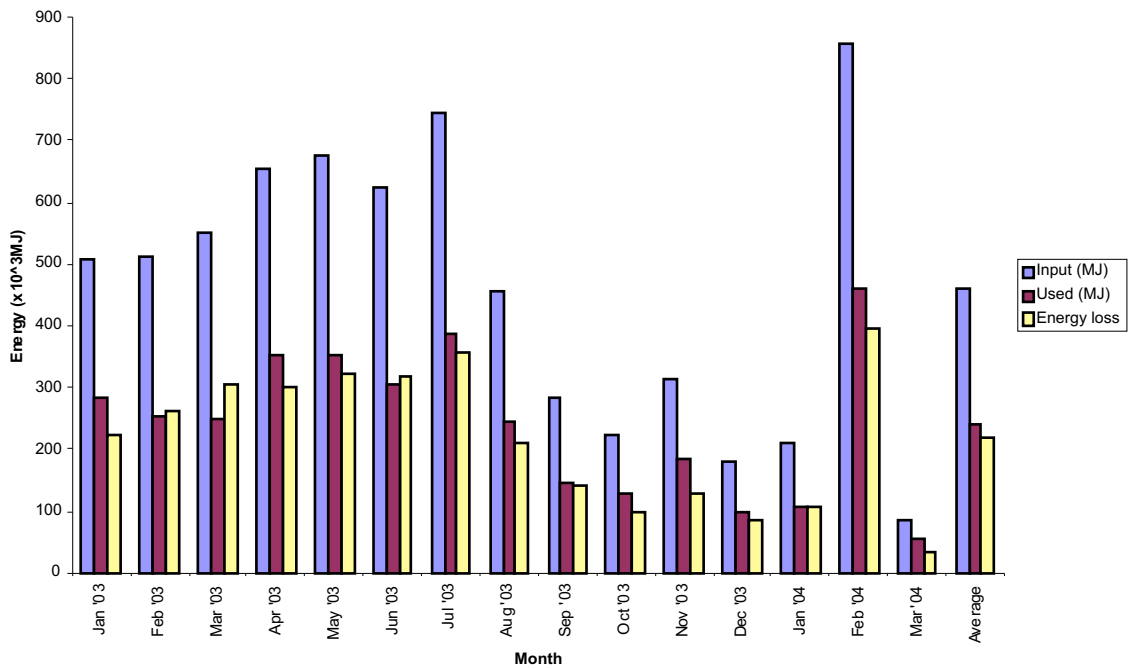


Fig. 3 (a): Monthly Average Energy Trend in EAF-1 Section



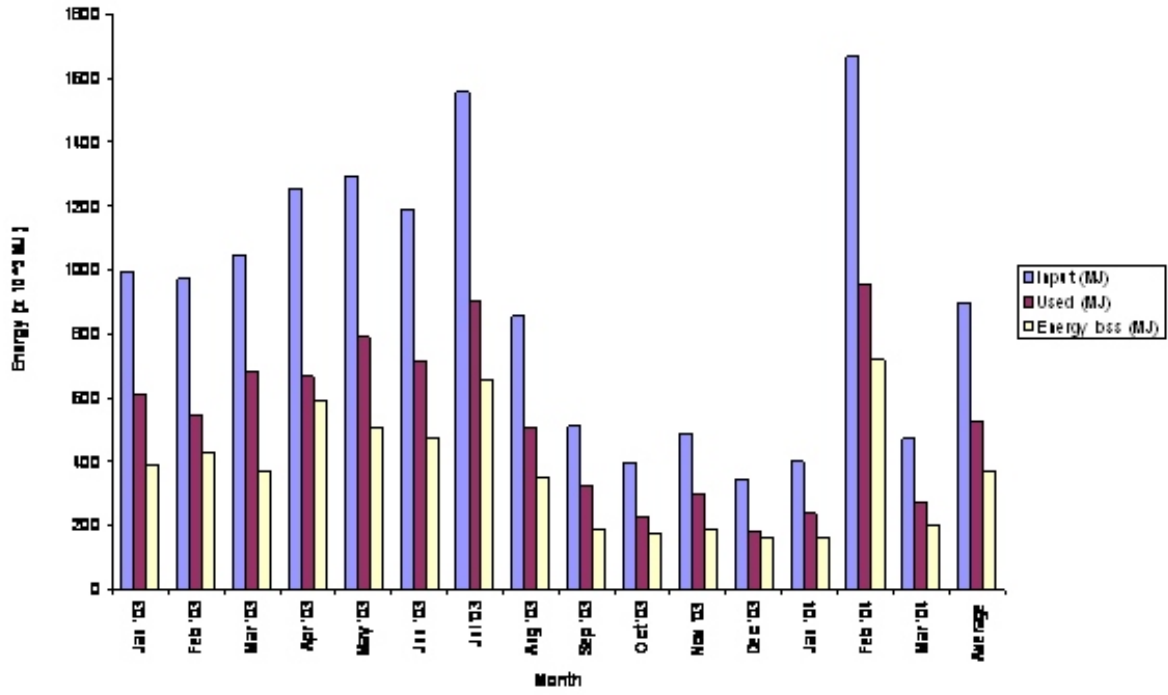


Fig 3 (b): Monthly Average Energy Trend in EAF-2 Section

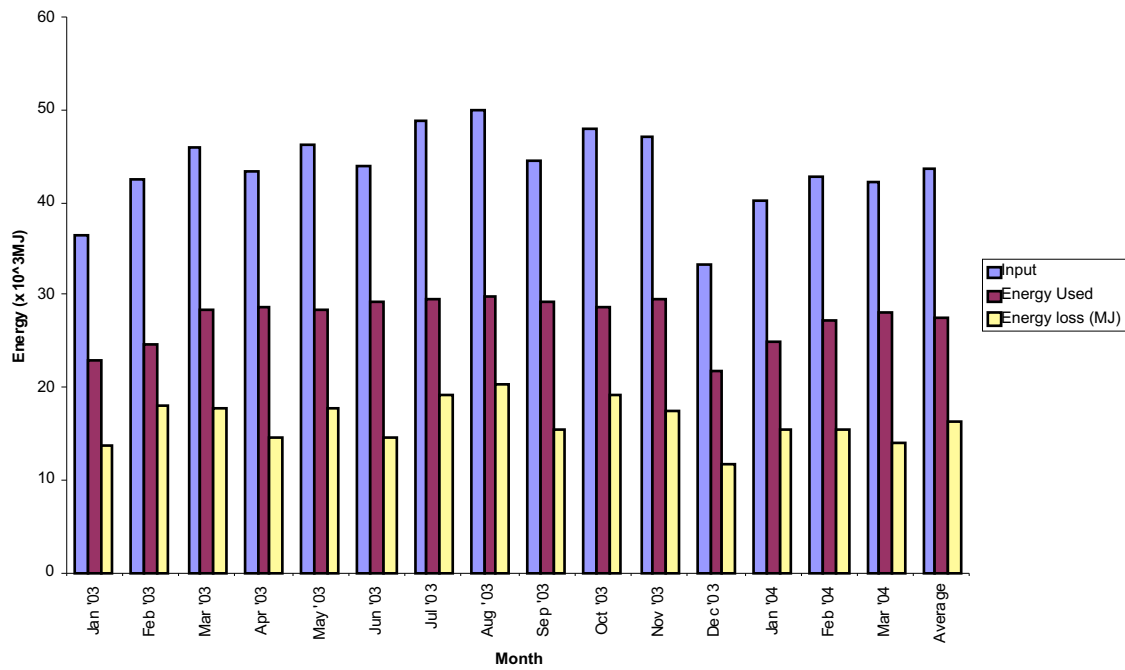


Fig.3 (c): Monthly Average Energy Trends in Continuous Casting Section

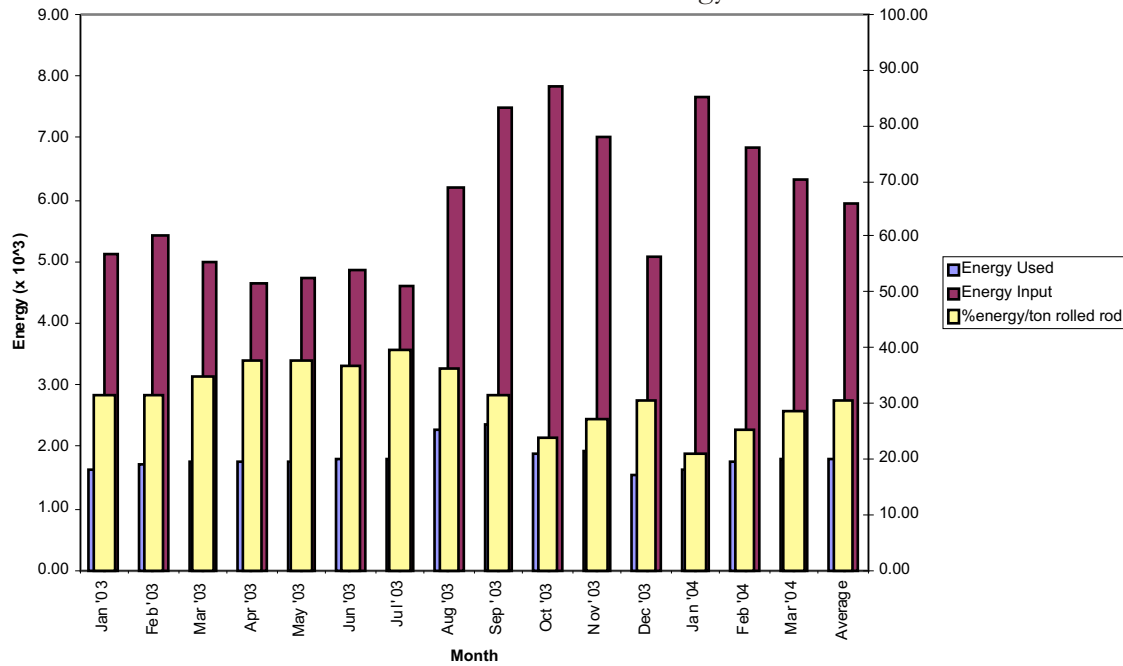


Fig. 3 d: Monthly Average Energy (MJ) Trends in Rolling Mill Section

annual average mass efficiency is 91% with monthly range of 90% to 92%. The average percentage of the gaseous emission per ton-billet is 0.18% which is relatively small when compared with emission from either furnace, which might be due to the tundish used in the continuous casting process being a closed system. At the rolling mill section, the annual average mass efficiency was 97%, ranging from 96% to 97%. This high efficiency is expected because of the recycling of the waste rod back into the system.

The monthly emission factor for EAF-1 ranges from 29 to 38 kg/ton-molten steel produced with a monthly average of 34 kg/ton, while that of EAF-2 ranges from 34 -39 kg/ton-molten steel produced with monthly average of 36.4 kg /ton. These values at EAFs were higher than the 25 kg/ton-molten steel of recycling iron and steel industries for an EAF in USA (US EPA, 1995a). The high values might be an indication of the emissions of gaseous pollutants into the air at EAF-1 and EAF-2 due to partial closure of the furnaces during charging of the scrap and opening of the furnace during pouring of the molten steel. At the continuous casting, the monthly emission factor ranges from 1.24 to 2.82 kg/ton-billet produced with an average of 1.8 kg/ton-billet. Also, at the rolling mill the monthly emission factor ranges from 3.15 to 4.51 kg/ton-rolled rod with average value of 3.8 kg/ton-rolled rod.

Figures 3(a) - (d) show the average monthly trend of total energy inputs, energy used to produce products and energy loss in the four production processes. When fully loaded with scraps, the

average input energy was very high in the EAF-2 due to the higher capacity of the furnace (6.84 tons) when compared with EAF-1 (4.88 tons). But the annual average energy consumption per ton (23.6kWh/ton) of molten steel for EAF-2 was lower when compared with average energy consumption per ton molten steel (29.4kWh/ton) for EAF-1. This reflected in the energy efficiencies of the two furnaces in which the annual average energy efficiency for EAF-1 was 52% while that of EAF-2 was 59%. The reason might be as result of EAF-2 being a newer furnace and of improved technology, since both furnaces are of the same brand, though of different capacities. The efficiencies can be compared with a typical EAF in steel-making process in USA which has energy efficiency of 67% (Costa et al., 2001). IISI (1998) had studied the efficiency of a Basic Oxygen furnace (BOF) and found it to be about 72%. This is significantly higher than the EAFs considered here. The reason for this might be due to the energy lost as a result of high conventional loss in the EAF. The annual average energy consumption per ton of billet produced at continuous casting was 1.27kWh/ton billet with the annual average energy efficiency of 63% which is higher compared with either of the furnaces. The monthly energy efficiency of the continuous casting ranged from 58% to 67% from January, 2003 to March, 2004. The reason for higher energy efficiency when compared with EAFs might be due to energy conservation in the tundish (a closed system). From figure 3d for rolling mill, the monthly energy used ranged from

**Table 1 (a):** Range and Annual Average Concentration ( $\mu\text{g}/\text{m}^3$ ) for TSP in each Production Process of a Scrap Iron and Steel Smelter in Lagos, Nigeria.

| Section            | Range     | Annual average |
|--------------------|-----------|----------------|
| EAF-1              | 1150-4125 | 2306           |
| EAF-2              | 1632-5432 | 3335           |
| Continuous casting | 250-4140  | 2534           |
| Rolling mill       | 96-1261   | 646            |

**Table 1(b):** Range and Annual Average Mass Concentration ( $\mu\text{g}/\text{m}^3$ ) for  $\text{PM}_{2.5}$  in each Production Process of a Scrap Iron and Steel Smelter in Lagos, Nigeria.

| Section            | Range  | Annual average |
|--------------------|--------|----------------|
| EAF-1              | 36-475 | 190            |
| EAF-2              | 49-462 | 153            |
| Continuous casting | 9-311  | 148            |
| Rolling mill       | 34-316 | 93             |

**Table 1(c):** Range and Annual Average Mass Concentration ( $\mu\text{g}/\text{m}^3$ ) for  $\text{PM}_{10}$  in each Production Process of a Scrap Iron and Steel Smelter in Lagos, Nigeria.

| Section            | Range    | Annual average |
|--------------------|----------|----------------|
| EAF-1              | 461-6098 | 2051           |
| EAF-2              | 311-8844 | 4570           |
| Continuous casting | 312-7388 | 3319           |
| Rolling mill       | 183-1110 | 687            |

21% to 39% when compared with the total energy input and with an annual average energy consumption of 505kWh/ton-rolled rod amounting to 31% of the total input energy. About 69% of the annual average energy used in different components of the rolling mill (preheating the oven, roller, etc) was not included in this efficiency estimated.

The airborne particulate load ( $\text{g}/\text{m}^3$ ) is presented in terms of the range and the mean of the mass concentration for SPM,  $\text{PM}_{2.5}$  and  $\text{PM}_{10}$  particulate fraction in all the selected sites. The results presented in Tables 1(a) to (c) show high particulate mass loading at the two electric arc furnaces in comparison with the remaining sections. The high particulate loadings at the said two furnaces corroborate the high emission factors recorded at the furnaces.

## CONCLUSIONS

The activity of the iron and steel smelting factory was monitored for a period of one year in

relation to the mass and energy usage as well as airborne particulate emissions. The study identified four major production sections. Annual average energy efficiency of 59% was estimated for EAF-2 while 52% was estimated for EAF-1. The efficiencies were compared with a typical EAF in steelmaking process in USA which had energy efficiency of 67%. On energy efficiency, the conclusion is that, it is lower for both furnaces, when compared to what is obtainable in United State. In case of mass efficiency, the efficiencies at all the production processes were between 89% and 97%. The highest average gaseous emission/ton-molten steel produced at EAF-2 was 3.6% when compared with total molten steel produced, indicating that more particulate was emitted at the furnaces. High particulate mass loading has been recorded at the two electric arc furnaces in comparison with the remaining sections. The high particulate loadings at the said two furnaces corroborate the high emission factors recorded at the furnaces.

For energy and material efficiencies, it is recommended that proper documentation of total input in terms of sources of energy used, capacity of the machine used, material input like scrap used, fluxes at each stage of production must be carried out from time to time. Also, documents on problem day when machine have fault, nature of the fault, should be properly maintained and this assessment should be encouraged every five years. There is the need to improve on dust control strategy and devices in this industry and regular monitoring should be encouraged so as to have proper documentation of air quality in each production process.

## REFERENCES

- (1) Adejumo, J.A., Obioh, I.O, Ogunsola, O.J., Akeredolu, F.A, Olaniyi, H.B., Oluwole, A.F., Asubiojo, O.I., Akanle, O.A. and N.M. Spyrou, 1994. The Atmospheric Deposition of Major, Minor and Trace Elements within and Around Three Cement Factories, *J. Radioanal. and Nucl. Chem. Articles*, 179 (2): 195-204.
- (2) Akeredolu F. 1989. Atmospheric Environment problems in Nigeria. An overview; *Atmospheric Environment*, 23 (4): 783-792.
- (3) Anderson, S. H., Goodfellow, H. D, and E. J. Evenson, 1998. 'EAF optimization increases productivity while reducing pollution and production costs. In *Environmental Innovations in the Metals Industry for the 21st Century*': *Proceedings of a Specialty Conference Cosponsored by the Air & Waste Management Association*.
- (4) Baker Environmental Inc. 1992. *Report on Steel Industry Waste Generation Disposal*.
- (5) Bradley, E. 1989. High-Performance Castings. A Technical Guide, ASM International.
- (6) China's Agenda-White Paper on China's Population, Environment, and Development in the 21<sup>st</sup> Century, 1994. China Environmental Science Press, Beijing.
- (7) Costa, M. M., Schaeffer, R, and E. Worrell, 2001. Exergy accounting of energy and materials flows in steel production systems. *Energy*, 26: 363-384.
- (8) International Iron and Steel Institute 1998. Energy use in steel industry. Brussels: Committee on Technology.
- (9) Little, A. D. 1992. Alternative Melting Technologies in Scrap-Based Steelmaking. EPRI Center for Material Production.
- (10) Marsosudiro, P.J. 1994. *Pollution Prevention in the Integrated Iron and Steel Industry and Its Potential Role in MACT Standards Development*. '94-TA28.02. U.S. Environmental Protection Agency.
- (11) Obiajunwa, E. I., Johnson-Fatokun, F.O., Olaniyi, H.B., A.F. Oluwole, 2002. Determination of the elemental composition of aerosol samples in the working environment of a secondary lead smelting company in Nigeria using EDXRF technique. *Nuclear Instruments and Methods in Physics Research B*, 194: 65-68.
- (12) OECD/IEA/Eurostat 2004. Energy Statistics Manual. Available at website: [http://www.iea.org/db/tw/wp/d/textbase/nppdf/free/2004/statistics\\_manual.pdf](http://www.iea.org/db/tw/wp/d/textbase/nppdf/free/2004/statistics_manual.pdf).
- (13) Ogunsola, O.J., Obioh, I. O, Akeredolu, F. A, Olaniyi, H. B, Asubiojo, O. I, Oluwole, A. F, and G. Baumbach, 1995. Continuous Monitoring of Air Quality in Large Tropical Metropolis- Lagos City. *Proc. of the 10<sup>th</sup> World Clean Air Congress*. Volume 2: Air Pollution, (P. Antilla, J. Kamari and M. Tolvanien (eds.), 28 May to 2 Jun. 1995), Espoo, Finland, The Finish Air Pollution Society Helsinki, ISBN 952-6473-X, Paper.
- (14) Thomson, M. J., Evenson, E. J., Kempe, M. J., And H. D. Goodfellow, 2000. Control of Greenhouse Gas Emissions from Electric Arc Furnace *Steelmaking*' *Ironmaking and Steelmaking*, 27(4): 273-279.
- (15) U.S. Environmental Protection Agency 1995a. *Profile of the Iron and Steel Industry*. EPA 310-R-95-005.
- (16) U.S. Environmental Protection Agency 1995b. 'Draft Iron and Steel Regulatory Review, 40 CFR Part 420.' *Effluent Limitations Guidelines and Standards for the Iron and Steel Manufacturing Point Source Category*.
- (17) U.S EPA (1999). *Air Quality Criteria for Particulate Matter II*. United States Environmental Protection Agency, Research Triangle Park. NC., Report No. EPA 600/P-99/002b.

**Ife Journal of Science**  
**Tables of Contents: June Edition 2011; Vol. 13, No. 1**

|   |   |     |
|---|---|-----|
| Omotoye Olorode, Sekinat O. Hassan,<br>Olajumoke A. Olabinjo and Idris O. Raimi | Tithonia (Asteraceae) in Nigeria  | 1   |
| Obuotor E.; Adewumi A. A. and Olaleye V. F.                                     | The Effect of Copper on Some Laboratory Indices of <i>Clarias Gariepinus</i> (Burchell 1822).   | 11  |
| Salami, B. M. Conte, R. A. and Falebita, D. E.                                  | Geoelectric Evaluation of the Groundwater Potential of Parts of Osogbo, Southwestern, Nigeria   | 17  |
| Ogunfowokan A.O., Akanni M.S.,<br>Ajibola R.O and Ayinde F.O.                   | Trophic Status and Physico-Chemical Parameters of Three Reservoirs in Osun State Nigeria  | 27  |
| Oláyiwolá M.A <sup>1</sup> and Odébòdé M.O.                                     | Foraminiferal Distribution of Southwestern Nigeria's Offshore Littoral Sediments: Benthic Faunal Diversity Indices and Patterns   | 45  |
| Chinedu S.N., Okochi V. I. and Omidiji O.                                       | Cellulase Production by Wild Strains of <i>Aspergillus Niger</i> , <i>Penicillium Chrysogenum</i> and <i>Trichoderma Harzianum</i> Grown on Waste Cellulosic Materials. | 57  |
| Bayode S. and Akpoarebe O.  | An Integrated Geophysical Investigation of a Spring in Ibuji, Igbara-Oke, Southwestern Nigeria.   | 63  |
| M. O. Adepoju and J. A. Adekoya   | Reconnaissance Geochemical Study of a Part of Igarra Schist Belt, Southwestern Nigeria  | 75  |
| Adesina, G.O., Akinyemiju, O.A.<br>and Muoghalu, J.I.                           | Checklist of the Aquatic Macrophytes of Jebba Lake, Nigeria   | 93  |
| Fasasi, K. A., Malaka, S. L. O. and Amund, O. O.                                | Studies on the Life Cycle and Morphometrics of Honeybees, <i>Apis Mellifera Adansonii</i> (Hymenoptera: Apidae) In A Mangrove Area of Lagos, Nigeria.                   | 103 |
| A.O. Olorunfemi, K.S. Salahudeen and<br>T.A. Adesiyun                           | Ground Water Quality in Ejigbo Town and Environs, Southwestern Nigeria  | 111 |
| Govardhan Singh, R.S; Ogunsina, B.S.<br>and Radha, C.                           | Protein Extractability from Defatted <i>Moringa Oleifera</i> Lam. Seeds Flour   | 121 |
| A. M. A. Sakpere  | Identification of ISSR Primers for Genetic Analysis of <i>Telfairia Occidentalis</i> Hook F.  | 129 |
| O. K. Owoade, F. S. Olise, H. B. Olaniyi,<br>I. B. Obioh and E. Bolzacchini     | Mass and Energy Audit in a Nigerian Iron and Steel Smelting Factory: An Operational and Efficiency Study.   | 133 |
| F. A. Oloyede, B. Aponjolosun<br>& A. A. Ogunwole                               | Reproductive Potentials of a Tropical Fern <i>Cyclosorus Afer</i> (Christ.) Ching (Thelypteridaceae: Pteridopyhte) at Obafemi Awolowo University, Ile Ife, Nigeria      | 143 |
| M.O.Olawole, L. Msimanga,<br>S.A.Adegboyega & F.A. Adesina                      | Monitoring and Assessing Urban Encroachment into Agricultural Land - A Remote Sensing and GIS Based Study of Harare, Zimbabwe   | 149 |
| Benjamin, U.K and Nwachukwu, J.I  | Model Compaction Equation for Hydrostatic Sandstones of the Niger Delta. 161  |     |
| J.O. Ojo and C.E. Adeeyinwo   | Dependence of Vanadium Recovery on Oxidation State in its Solvent Extraction from Hydrochloric Acid Solutions With TRI N Butyl Phosphate                                | 175 |
| Akintorinwa, O. J., Ojo J. S.<br>and Olorunfemi M. O.                           | Appraisal of the Causes of Pavement Failure along the Ilesa - Akure Highway, Southwestern Nigeria Using Remotely Sensed and Geotechnical Data                           | 185 |
| O. J. Matthew and O. O. Jegede  | Modelling Soil Surface Temperature and Heat Flux Using Force-Restore Method at an Agricultural Site in Ile-Ife, Nigeria.  | 199 |
| Ojo J.F.  | On the Theory of One Dimensional Integrated Autoregressive Bilinear Time Series Modelling   | 209 |